

Home Standby - 7kW - 12kW - 15kW

Air-Cooled Gas Engine Generator Sets

Continuous Standby Power Rating

Model ASPAS1BBA007 - 7kW 60Hz

Model ASPAS1BBA012 - 12kW 60Hz

Model ASPAS1BBA015 - 15kW 60Hz

INCLUDES:

- Automatic Transfer Switch with Built-In Emergency Load Center
- Pre-wired External Connection Box
- Flexible Fuel Line
- Composite Mounting Pad
- Pre-wired conduits
- Natural Gas or LP Gas Operation
- GFCI duplex outlet & 12Vdc outlet
- UL Listed to Canadian safety standards
- 2 Year Limited Parts and Labor Warranty



FEATURES

- ☐ **INNOVATIVE DESIGN & PROTOTYPE TESTING** are key components of BRYANT's success in "IMPROVING POWER BY DESIGN." But it doesn't stop there. Total commitment to component testing, reliability testing, environmental testing, destruction and life testing, plus testing to applicable CSA, NEMA, EGSA, and other standards, allows you to choose BRYANT with the confidence that these systems will provide superior performance.
- ☐ **TEST CRITERIA:**
 - ✓ **PROTOTYPE TESTED**
 - ✓ **SYSTEM TORSIONAL TESTED**
 - ✓ **NEMA MG1-22 EVALUATION**
 - ✓ **MOTOR STARTING ABILITY**
- ☐ **SOLID-STATE, FREQUENCY COMPENSATED VOLTAGE REGULATION.** This state-of-the-art power maximizing regulation system is standard on all BRYANT models. It provides optimized **FAST RESPONSE** to changing load conditions and **MAXIMUM MOTOR STARTING CAPABILITY** by electronically torque-matching the surge loads to the engine.
- ☐ **SINGLE SOURCE SERVICE RESPONSE** from BRYANT's dealer network provides parts and service know-how for the entire unit, from the engine to the smallest electronic component. You are never on your own when you own a BRYANT system.
- ☐ **BRYANT TRANSFER SWITCHES.** Long life and reliability are synonymous with BRYANT systems. One reason for this confidence is that the BRYANT product line includes its own transfer systems and controls for total system compatibility.




ENGINE	• Durable (OHVI) Design • "Spiny-lok" cast iron cylinder walls • Electronic ignition, spark advance and compression release • Full pressure lubrication system • Low oil pressure shutdown system • High temperature shutdown	Maximizes engine "breathing" for increased fuel efficiency. Cylinder walls run cooler, reducing oil consumption. Because heat is the primary cause of engine wear, the OHVI has a significantly longer life than competitive engines. Rigid construction and added durability provide long engine life. These features combine to assure smooth, quick starting every time. Superior lubrication to all vital bearings means better performance, less maintenance and significantly longer engine life. Superior shutdown protection prevents catastrophic engine damage due to low oil. Prevents damage due to overheating.
GENERATOR	• Revolving field • Skewed stator • Displaced phase excitation • Automatic voltage regulation • UL 2200 Listed	Allows for smaller, light weight unit that operates 25% more efficiently than a revolving armature generator. Produces a smooth output waveform for compatibility with electronic equipment. Maximizes motor starting capability. Provides more surge capability than brushless generator designs. Regulates the output voltage to $\pm 2\%$ prevents damaging voltage spikes. For your safety
TRANSFER SWITCH	• Fully Automatic • Remote Mounting • UL Listed	Transfers your vital electrical loads to the energized source of power. Mounts near your existing distribution panel for simple, low cost installation. For your safety
MICROPROCESSOR CONTROL	• Manual/Auto/Off switch • Utility voltage sensing • Utility interrupt delay • Engine warm-up • Engine cool-down • Seven day exerciser • Timed Trickle Battery charger • Main Line Circuit Breaker	Selects the operating mode. Constantly monitors utility voltage, setpoints 60% dropout, 80% pick-up, of standard voltage. Prevents nuisance start-ups of the engine, set point approximately 15 seconds. Ensures engine is ready to assume the load, set point approximately 10 seconds. Allows engine to cool prior to shutdown, setpoint approximately 1 minute. Operates engine to prevent oil seal drying and damage between power outages. Maintains battery amperage to insure starting. Protects generator from overload.
UNIT	• Weather protective enclosure • Enclosed critical grade muffler • Small, compact, attractive	Ensures protection against mother nature. Hinged key locking roof panel for security. Electrostatically applied epoxy paint for durability. Quiet, critical grade muffler is mounted inside the unit to prevent injuries. Makes for an easy, eye appealing installation.
INSTALLATION SYSTEM	• Pre-wired External Connection Box • 1' Flexible Fuel Line • Composite Mounting Pad • Pre-wired conduits • UL Listed wire nuts	Easy Installation - Virtually all hardware included, plus step-by-step photographed Installation Guide.

TRANSFER SWITCH & EMERGENCY LOAD CENTER	Model ASPAS1BBA007 (7kW)	Model ASPAS1BBA012 (12kW)	Model ASPAS1BBA015 (15kW)
No. of Poles	2	2	2
Current Rating (amps)	100	100	100
Voltage Rating (VAC)	250	250	250
Utility Voltage Monitor (fixed)			
-Pick-up	70%	70%	70%
-Dropout	60%	60%	60%
Return to Utility	approx. 13 sec	approx. 13 sec.	approx. 13 sec.
Exerciser weekly for 12 minutes	Standard	Standard	Standard
UL Listed	Standard	Standard	Standard
Dimensions (H" x W" x D")	26.5 x 12.5 x 7	26.5 x 12.5 x 7	26.5 x 12.5 x 7
Total of Pre-wired Circuits	8	10	12
No. 15A 120V	5	3	5
No. 20A 120V	1	3	3
No. 15A 240V	-	-	-
No. 20A 240V	-	1	1
No. 30A 240V	1	1	1
Circuit Breaker Protected			
Available RMS Symmetrical			
Fault Current @ 250 Volts	10,000	10,000	10,000

Transfer Switch Features

- Electrically operated, mechanically-held contacts for fast, positive connections.
- Rated for all classes of load, 100% equipment rated, both inductive and resistive.
- 2 pole, 250 VAC contactors.
- 160 millisecond transfer time.
- Dual coil design.
- Main contacts are silver plated or silver alloy to resist welding and sticking.
- NEMA 1 enclosure is standard on the 100 amp switch.

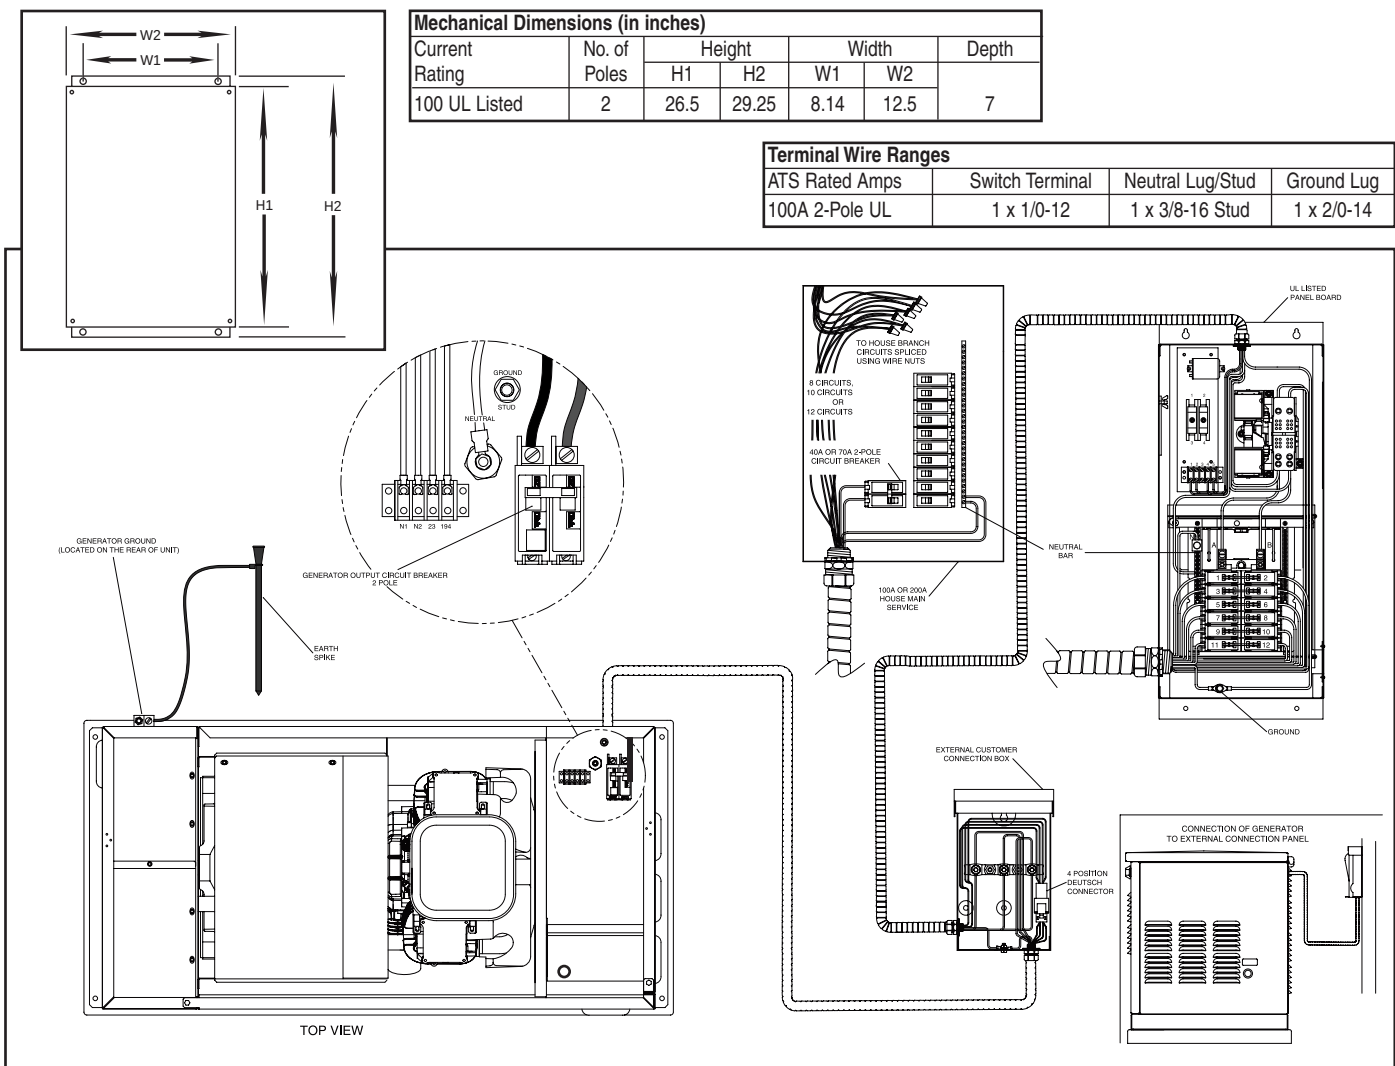

Home Standby - 7kW - 12kW - 15kW



GENERATOR	Model ASPAS1BBA007 (7kW)	Model ASPAS1BBA012 (12kW)	Model ASPAS1BBA015 (15kW)
Rated Maximum Continuous Power Capacity (LP).....	7,000 Watts*	12,000 Watts*	15,000 Watts*
Rated Maximum Continuous Power Capacity (NG).....	6,000 Watts*	12,000 Watts*	13,000 Watts*
Rated Voltage.....	120/240	120/240	120/240
Rated Maximum Continuous Load Current			
120 Volts	50.0 NG/58.3 LP	100.0 NG/100.0 LP	108.3 NG/125.0 LP
240 Volts	25.0 NG/29.2 LP	50.0 NG/ 50.0 LP	54.2 NG/62.5 LP
Main Line Circuit Breaker	30 Amp	50 Amp	65 Amp
Phase	.1	.1	.1
Number of Rotor Poles	.2	.2	.2
Rated AC Frequency	60Hz	60Hz	60Hz
Power Factor	.1	.1	.1
Battery Requirement (not included)	Group 26	Group 26	Group 26
	12 Volts and	12 Volts and	12 Volts and
	350 Cold-cranking	525 Cold-cranking	525 Cold-cranking
	Amperes Minimum	Amperes Minimum	Amperes Minimum
Shipping Weight (lbs.) (Includes Transfer Switch)	375	470	487
Dimensions (L" x W" x H").....	48 x 24 x 28-1/4	48 x 24 x 28-1/4	48 x 24 x 28-1/4
ENGINE	Model ASPAS1BBA007 (7kW)	Model ASPAS1BBA012 (12kW)	Model ASPAS1BBA015 (15kW)
Type of Engine	OHVI	OHVI V-TWIN	OHVI V-TWIN
Number of Cylinders.....	1	2	2
Rated Horsepower.....	14.5 @ 3,600 rpm	30 @ 3,600 rpm	30 @ 3,600 rpm
Displacement.....	410cc	.992cc	.992cc
Cylinder Block.....	Aluminum w/Cast	Aluminum w/Cast	Aluminum w/Cast
	Iron Sleeve	Iron Sleeve	Iron Sleeve
Valve Arrangement.....	Overhead Valve	Overhead Valve	Overhead Valve
Ignition System.....	Solid-state w/Magneto	Solid-state w/Magneto	Solid-state w/Magneto
Compression Ratio.....	8.6:1	9.5:1	9.5:1
Starter.....	12 Vdc	12 Vdc	12Vdc
Oil Capacity Including Filter.....	Approx. 1.5 Qts	Approx. 1.7 Qts.	Approx. 1.7 Qts.
Operating RPM.....	3,600	3,600	3,600
Fuel Consumption			
Natural Gas cu.ft./hr.			
1/2 Load	.66	.152	.156
Full Load	.119	.215	.220
Liquid Propane ft ³ /hr(gal/hr)			
1/2 Load	.30(0.82)	.56(1.53)	.58(1.58)
Full Load	.54(1.47)	.76(2.08)	.88(2.40)
Required fuel pressure to generator fuel inlet at all load ranges - 5 to 7 inches of water column for natural gas, 11 to 14 inches of water column for LP gas			
CONTROLS			
Model Switch			
- AutoAutomatic Start on Utility failure/7 day exerciser			
- Off.	Stops unit. Power is removed control and charger still operate		
- Manual/Test (start)	Start with starter control, unit stays on. If utility fails, transfer to load takes place.		
Engine Start Sequence.....	Cyclic cranking: 7 sec. on, 7 rest (90 sec. maximum duration)		
Engine Warm-up.....	10 seconds		
Engine Cool-Down	1 minute		
Starter Lock-out	Starter cannot re-engage until 5 sec. after engine has stopped.		
2.5 Amp Timed Trickle Battery Charger.....	Standard		
Automatic Voltage Regulator w/Overvoltage Protection	Standard		
Automatic Low Oil Pressure Shutdown	Standard		
Overspeed Shutdown	Standard, 72Hz		
High Temperature Shutdown	Standard		
Overcrank Protection	Standard		
Safety Fuse.....	Standard		

Rating definitions - Standby: Applicable for supplying emergency power for the duration of the utility power outage. No overload capability is available for this rating. (All ratings in accordance with BS5514, ISO3046 and DIN6271). Prime (Unlimited Running Time): Unit not recommended for prime power applications. Applicable for supplying electric power in lieu of commercially purchased power. Prime power is the maximum power available at variable load. A 10% overload capacity is available for 1 hour in 12 hours. (All ratings in accordance with BS5514, ISO3046, ISO8528 and DIN6271).
 * Maximum wattage and current are subject to and limited by such factors as fuel Btu content, ambient temperature, altitude, engine power and condition, etc. Maximum power decreases about 3.5 percent for each 1,000 feet above sea level; and also will decrease about 1 percent for each 12° C (10° F) above 15.5° C (60°F).